

# Metro C5 T-Series Short Form Specifications (Digital Controls)



Metro C5 T-Series with Transport Armour™ heavy-duty heated holding cabinets shall be constructed of type 304 stainless steel with CFC free foamed-in-place polyurethane insulation. The cabinet shall have a vaulted door for maximum structural integrity, with 11 gauge stainless steel hinges, and an information panel for documentation management. The cabinet shall have the ability to keep hot food safe and out of the danger zone for 5 hours or longer while unplugged. It shall have steel reinforced polymer handles that double as bumpers, polymer Armour panels with built in vertical hand holds mounted to the sides of the cabinet. It shall also include a three-point-control handle on the back side of the cabinet (except ½ height cabinets). The cabinet shall have a maximum operating temperature of 200°F, be rated at 120V, 12A, 60Hz, 1400W, and have a coiled power cord with a NEMA 5-15P plug. The cabinet shall have top mount solid state digital controls with a battery operated mobile power system that gently circulates air inside the cabinet and keeps the controller illuminated and functional while unplugged. The cabinet shall be 73.88" (1876mm), 65.44" (1662mm), or 48.56" (1234mm) tall, 30" (762mm) wide, and 39.25" (997mm) deep. Slides will be adjustable bottom or lip load style aluminum extrusions on 1.675" (43mm), or fixed aluminum lip load on 1.675" (43mm) increments. The cabinet shall be energy Star, UL, CUL, and NSF listed.

(Copy cabinet specifics here)

Model Number	Height	Material	Doors (/Pass-Thru Doors)	Slides	Pan Capacity

Accessories to include:

- Small Item Shelf (C5T-SHELF)
- Travel Latch / Hasp (C5T-TRVL)
- Straight Plug (120V) (C5T-STRPLG)
- Adjustable Bottom Load Slide Pair (C5T-BSLIDEPR) Qty:
- Adjustable Lip Load Slide Pair (C5T-LSLIDEPR) Qty:
- Full Height Correctional Package (C5T-CORR-9)
- Dual Cavity Correctional Package (C5T-CORR-9D)
- 5/6 Height Correctional Package (C5T-CORR-8)
- 1/2 Height Correctional Package (C5T-CORR-5)
- 220-240V, 6A, 50/60Hz, 1176-1400W (NEMA 6-15P)

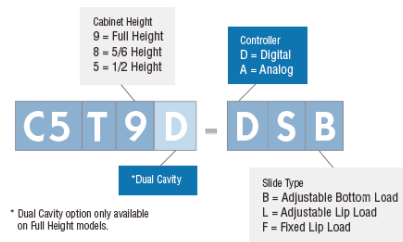

C5 T 9 X - D S B For Export (220-240V, 50/60Hz) Cabinets. (No Up-charge)

<b>Full Height</b>					
<b>Model Number</b>	<b>Height</b>	<b>Controls</b>	<b>Single / Dual Cavity</b>	<b>Slides</b>	<b>Pan Capacity</b>
C5T9-DSB	Full Height (73.88")	Digital Solid State	Single Cavity	Adjustable Bottom Load on 1.675" Increments	(16) 18"x26", (32) 12x20x2.5"
C5T9-DSL	Full Height (73.88")	Digital Solid State	Single Cavity	Adjustable Lip Load on 1.675" Increments	(16) 18"x26", (32) 12x20x2.5"
C5T9-DSF	Full Height (73.88")	Digital Solid State	Single Cavity	Fixed Lip Load	(32) 12x20x2.5" / GN 1/1 (65mm)

<b>Full Height Dual Cavity</b>					
<b>Model Number</b>	<b>Height</b>	<b>Controls</b>	<b>Single / Dual Cavity</b>	<b>Slides</b>	<b>Pan Capacity</b>
C5T9D-DSB	Full Height Dual Cavity (73.88")	Digital Solid State	Dual Cavity (independent cavity control)	Adjustable Bottom Load on 1.675" Increments	(14) 18"x26", (32*) 12x20x2.5"
C5T9D-DSL	Full Height Dual Cavity (73.88")	Digital Solid State	Dual Cavity (independent cavity control)	Adjustable Lip Load on 1.675" Increments	(14) 18"x26", (28) 12x20x2.5"
C5T9D-DSF	Full Height Dual Cavity (73.88")	Digital Solid State	Dual Cavity (independent cavity control)	Fixed Lip Load	(32) 12x20x2.5" / GN 1/1 (65mm)

\* Floor of cavity used for (2) pan levels

<b>5/6 Height</b>					
<b>Model Number</b>	<b>Height</b>	<b>Controls</b>	<b>Single / Dual Cavity</b>	<b>Slides</b>	<b>Pan Capacity</b>
C5T8-DSB	5/6 Height (65.44")	Digital Solid State	Single Cavity	Adjustable Bottom Load on 1.675" Increments	(14) 18"x26", (28) 12x20x2.5"
C5T8-DSL	5/6 Height (65.44")	Digital Solid State	Single Cavity	Adjustable Lip Load on 1.675" Increments	(14) 18"x26", (26) 12x20x2.5"
C5T8-DSF	5/6 Height (65.44")	Digital Solid State	Single Cavity	Fixed Lip Load	(28) 12x20x2.5" / GN 1/1 (65mm)

<b>1/2 Height</b>					
<b>Model Number</b>	<b>Height</b>	<b>Controls</b>	<b>Single / Dual Cavity</b>	<b>Slides</b>	<b>Pan Capacity</b>
C5T5-DSB	1/2 Height (48.56")	Digital Solid State	Single Cavity	Adjustable Bottom Load on 1.675" Increments	(9) 18"x26", (18) 12x20x2.5"
C5T5-DSL	1/2 Height (48.56")	Digital Solid State	Single Cavity	Adjustable Lip Load on 1.675" Increments	(9) 18"x26", (16) 12x20x2.5"
C5T5-DSF	1/2 Height (48.56")	Digital Solid State	Single Cavity	Fixed Lip Load	(18) 12x20x2.5" / GN 1/1 (65mm)